

Product Information

FIFTSTUN - Scramble Tunnel

BS EN 1176 - Designed to British & European Standards


MATERIALS


Panel - High Density Polyethylene (HDPE)

Stainless Steel Brackets - Stainless steel with a dull polish finish

SUPPLY METHOD


Tunnel - Fully assembled

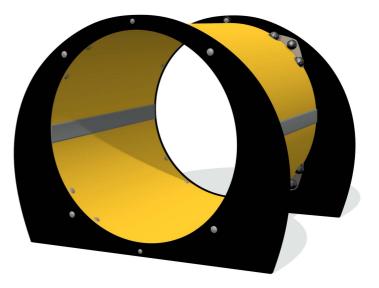



In-Ground Brackets & Fixings Supplied with Tunnel

DIMENSIONS

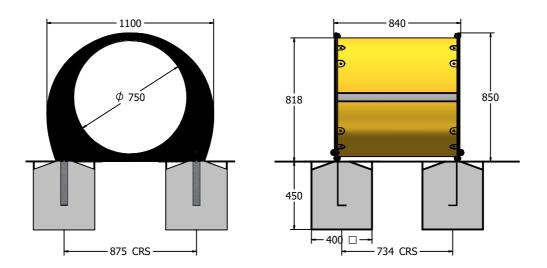

TECHNICAL

Age Range:
Largest Part:
Total Weight:
Surfacing:

2+ Years Tunnel Assembly - 850 x 1100 x 840mm

41kg Approx 1.5m from the extents of the equipment with a critical fall height in excess of 818mm

IMPORTANT: you must specify the colour option you require at the time of order if it is different from the colour listed/shown above, requirements are subject to availability at the time of order

Fahr Industries Ltd Spitfire Road, Old Sarum, Salisbury, Wiltshire, SP4 6GB, UK © 2020 Fahr Industries Ltd These designs and content belong to Fahr Industries Ltd and are not be reproduced in any way or by any means without written persmission Tel: +44 (0)1722 349793 Fax: +44 (0)1722 349792 Web: www.fahr-industries.com